



# Stratified Wire: thermo SD

## Brass Core, CuZn Coating




The new high performance wire, Thermo SD, has been developed in response to a market demand from the majority of EDM wire machines. Thermo SD offers high performance cutting speed combined with a very good surface finish.

- ↘ Very good performance / price ratio
- ↘ Universal usage on all EDM wire machines
- ↘ Gain of more than 15% cutting speed compared to brass wire thanks to its unique coating
- ↘ High precision in cutting with excellent surface finish

HIGH SPEED  
& PRECISION

Characteristics	Thermo SD
Core	CuZn Alloy
Coating	Alloy
Tensile strength	875 N/mm <sup>2</sup>
Yield strength	750 N/mm <sup>2</sup>
Elongation	2 %
Conductibility	20 % IACS

### Relative cutting speed (%)

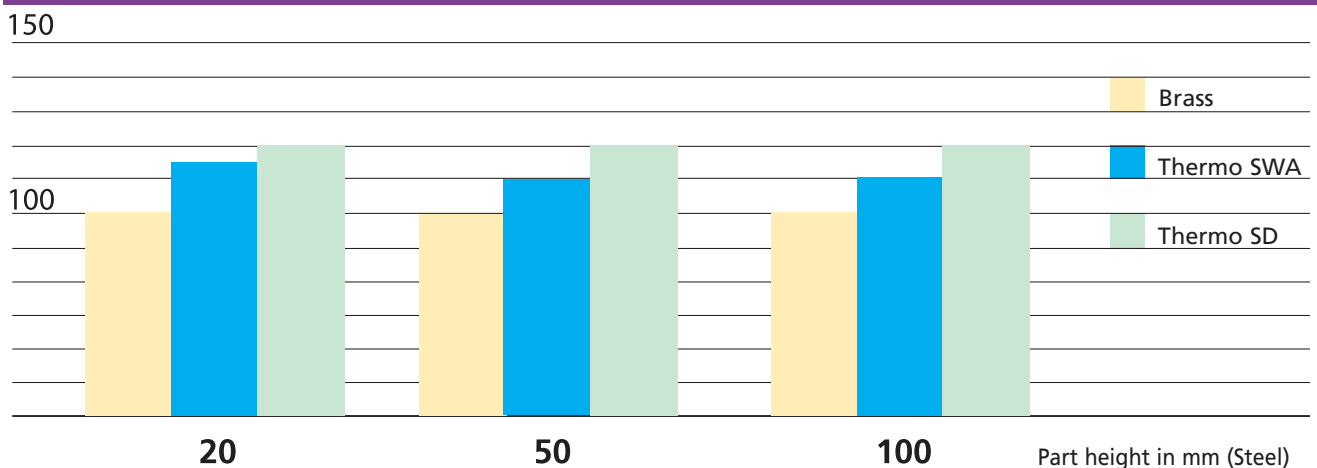

↘ TECSPPOOL and TECFIL are THERMOCOMPACT brand names  
 Z.I route de Sarves, Metz-Tessy B.P 21  
 74 371 Pringy Cedex - France - Tél. +33 4 50 27 20 02 - Fax +33 4 50 27 17 37





# Stratified Wire: thermo SD

## Thermo SD


		T125	T160	T200	K250	JP5	JP10	JP15
0,20mm 0,008"	Thermo SD	4 Kg 8,8 Lbs	8 Kg 17,6 Lbs	16 Kg 35,3 Lbs		5 Kg 11 Lbs	10 Kg 22 Lbs	20 Kg 44 Lbs
		14900 m 48800 Ft	29900 m 98000 Ft	59800 m 196100 Ft		18700 m 61300 Ft	37500 m 120000 Ft	74800 m 239300 Ft
0,25mm 0,010"	Thermo SD	4 Kg 8,8 Lbs	8 Kg 17,6 Lbs	16 Kg 35,3 Lbs	55 Lbs 25 Kg	5 Kg 11 Lbs	10 Kg 22 Lbs	20 Kg 44 Lbs
		9600 m 31400 Ft	19200 m 62900 Ft	38400 m 125900 Ft	60000 m 196800 Ft	12000 m 39300 Ft	24000 m 76800 Ft	48000 m 156600 Ft
0,30mm 0,012"	Thermo SD	4 Kg 8,8 Lbs	8 Kg 17,6 Lbs	16 Kg 35,3 Lbs	55 Lbs 25 Kg	5 Kg 11 Lbs	10 Kg 22 Lbs	20 Kg 44 Lbs
		6600 m 21100 Ft	13200 m 43200 Ft	26500 m 86900 Ft	41400 m 135800 Ft	8300 m 27200 Ft	16600 m 53100 Ft	33100 m 105900 Ft

HIGH SPEED  
& PRECISION

Thermo SD is only available on:



TECFIL


 TECSPPOOL and TECFIL are THERMOCOMPACT brand names  
 Z.I route de Sarves, Metz-Tessy B.P 21  
 74 371 Pringy Cedex - France - Tél. +33 4 50 27 20 02 - Fax +33 4 50 27 17 37

